

Attorney Docket No. 44376-028

Assistant Commissioner for Patents
Washington, D.C. 20231

PTO-FORM 1082 NEW APPLICATION TRANSMITTAL

Sir:

Transmitted herewith for filing is the X utility patent application of Inventors:

- (1) Tsumoru TATSUURA
- (2) Yasushi YAMADE
- (3)

Entitled: IMAGE FORMING APPARATUS

Enclosed are:

1. **The Papers Required For Filing Date Under 37 C.F.R. § 1.53(b):**
 - (24) Page(s) of Specification
 - (5) Pages of Claims
 - (1) Page of Abstract
 - (15) Sheets of Drawings
2. () **Executed Combined Declaration/Power of Attorney**
3. **Assignment**
 - () An Assignment (with Recordation Form Cover Sheet) of the invention to:
4. **Claim for Priority Under 35 U.S.C. § 120**
 - () The benefit under 35 U.S.C. § 120 is hereby claimed from the following United States application(s):
5. **Claim for Priority Under 35 U.S.C. § 119**
 - (X) The benefit of priority under 35 U.S.C. § 119 is hereby claimed from the following foreign application(s):
 - (1) Japanese Patent Application No. 10-323715
Filed: 13 November 1998
 - (X) A Letter submitting a certified copy of each above-identified foreign application(s) is enclosed.

11/10/99
JC542 U.S. PTO

JC542 U.S. PTO
09/437499
11/10/99

09/437499 - 11/10/99

6. Fee Calculation (claims as filed)

	NUMBER CLAIMS FILED			PRESENT EXTRA	RATE	ADDITIONAL FEE	RATE	ADDITIONAL FEE
TOTAL	20	MINUS	20	= 0	X 9 =	\$	X18 =	\$
INDEP	4	MINUS	3	= 1	X39 =	\$	X78 =	\$ 78.00
<input type="checkbox"/> FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM					+130=	\$	+260=	\$
						\$	TOTAL	\$ 78.00

() Amendment cancelling extra claims enclosed

() Amendment deleting multiple dependencies enclosed

7. Small Entity Statement

() A verified statement that this is a filing by a "small entity" under 37 C.F.R. §§ 1.9 and 1.27 is attached.
Filing Fee Calculation (50% of above) \$

8. Fee Payment (enclosed)

(X) Basic Filing Fee \$ 760.00
(X) Claim Fee Calculation Above \$ 78.00
() Recording Assignment (\$40.00; 37 C.F.R. § 1.21(h)(1)) \$ 0.00
Total Fees Enclosed \$ 838.00

9. Method of Payment of Fees

(X) Charge Deposit Account No. 13-0203 in the amount of \$ 838.00

10. Other Enclosures: Certified Copy of Priority Document(1) Information Disclosure Statement/Cited References(3)

11. Authorization to Credit Overpayment or Charge Additional Fees

(X) The Commissioner is hereby authorized to credit any overpayment, or charge fees under 37 C.F.R. § 1.16 (filing fees) or 37 C.F.R. § 1.17 (application processing fees) which may be required, to Deposit Account No. 13-0203. A duplicate copy of this Transmittal Letter is attached for accounting purposes.

05437499-11090

12. Conditional Petition For Extensions of Time

- (X) Petition is hereby made under 37 C.F.R. § 1.136(a) for any extension of time required to ensure that any papers due in the U.S. Patent and Trademark Office during the pendency of this application are timely filed. Please charge any fees due for any extensions of time to Deposit Account No. 13-0203. A duplicate copy of this Transmittal Letter is attached for accounting purposes.


13. Correspondence Address:

Michael E. Fogarty, Esq.
McDERMOTT, WILL & EMERY
600 13th Street, N.W.
Washington, D.C. 20005-3096
Telephone: 202-756-8000
Facsimile: 202-756-8087

Respectfully submitted,

McDERMOTT, WILL & EMERY

Date: 10 November 1999



Michael E. Fogarty
Registration No. 36,139

600 13th Street, N.W.
Washington, D.C. 20005-3096
Telephone: 202-756-8000
Facsimile: 202-756-8087

60013 " 664/E460

IMAGE FORMING APPARATUS

This application is based on application No. 10-323715 filed in Japan, the content of which is hereby incorporated by reference.

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to an image forming apparatus such as a printer for forming an image on a sheet-like thing.

2. Description of the Related Art

10 A prior printer with a plurality of discharge openings (including optional devices), more often than not, has been using the discharged openings as mail bins for allocating them to specific persons or addresses. Users of the printer can attain easy fulfillment of communications and notices
15 by directing output prints to mail bins assigned to certain persons.

 If a nonspecific plurality of users printout sheet-like things into a certain mail bin, this mail bin is eventually contained papers resulting from various layout
20 processing (such as, for example, paper size, Ninl, double-side printing, enlargement/contraction, stapling, perforation, and folding). The owners of the mail bin, therefore, have encountered the problem of finding difficulty in managing and orderly arranging the output

prints.

SUMMARY OF THE INVENTION

It is an object of this invention to provide an image
5 forming apparatus which is capable of automatically unifying
the layouts of prints to be discharged into the individual
mail bins.

This invention facilitates the management and orderly
arrangement of the discharged prints because it permits
10 automatic unification of the layouts processing of the prints
discharged into the discharge tray.

Particularly, when the apparatus is provided with a
plurality of the discharged trays, since the layouts are
unified for each of the destinations of discharge, the owners
15 using the individual discharged trays for mail bins are
enabled to enjoy a markedly improved convenience.

If an already edited image data is memorized in a memory
and the stock of the sheet-like things happens to run out,
it not only allows effective use of the memory because an
20 before edited image data and an information of edition do
not need to be respectively preserved but also aids in
decreasing the printout time because no edition is required
to be made anew on the printout which follows the
replenishment of the sheet-like things.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 is a schematic perspective view of a printer according to the invention.

5 Fig.2 is a plan view of an operating display shown in Fig. 1.

Fig.3 is a block diagram illustrating a typical embodiment of a system using the printer shown in Fig.1.

10 Fig.4 is a flow chart of the system showing the processing for the user's layout setting.

Fig.5 is a flow chart continuing from Fig.4.

Fig.6 is a flow chart continuing from Fig.4.

Fig.7 is a flow chart continuing from Fig.4.

15 Fig.8 is a plan view illustrating a "setting panel " of the operating display shown in Fig.2.

Fig.9 is a plan view illustrating a "panel of designating destinations of discharged papers" of the operating display shown in Fig.2.

20 Fig.10 is a plan view illustrating a "panel of set designation" of the operating display shown in Fig.2.

Fig.11 is a plan view illustrating a "panel of setting Nin1" of the operating display shown in Fig.2.

Fig.12 is a plan view illustrating a "panel of setting double-side printing" of the operating display shown in

Fig.2.

Fig.13 is a plan view illustrating a "panel of setting paper size" of the operating display shown in Fig.2.

Fig.14 is a flow chart illustrating the operation of the printer in response to reception of one job of print data.

Fig.15 is a diagram illustrating one example of the data configuration in the RAM.

Fig.16 is a schematic view showing the amount of memory required for printing 4 pages of A4 papers in the 4in1 format on A4 papers.

Fig.17 is a flow chart illustrating the operation of a modified version of the printer.

Fig.18 is a flow chart illustrating the sub-routine for the processing of the data storage shown in Fig.17.

Fig.19 is a flow chart illustrating the sub-routine for the processing of reprinting shown in Fig.17.

Fig.20 is a flow chart illustrating the conventional processing for data storage.

Fig.21 is a flow chart illustrating the conventional processing for reprinting.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiments of this invention will be described below with reference to the drawings annexed

hereto.

<<First embodiment>>

Refer to Fig.1, this printer 1 is set with four paper discharge openings, which are provided respectively with paper discharge trays 11a, 11b, 11c and 11d into which papers carrying a formed image are discharged. The each paper discharge trays 11 are previously allocated to certain persons or addresses and are used as so-called mail bins. This printer 1 is set with four paper feeding openings 12a, 12b, 12c, and 12d and allows arbitrary selection of the size of the papers used for printing from among four paper sizes (such as, for example, A4, A5, B4 and B5). The printer 1 is provided with an operating display 13 on the upper surface thereof. The user is enabled by means of the operating display 13 to set freely the layout of printed papers discharged into each of the discharged paper trays 11 for each destinations of discharged papers.

Refer to Fig.2, the operating display 13 is provided with an on-line key 131, a setting key 132 and a touch panel type liquid crystal display 133. The on-line key 131 turns on or off the state of connection with an external device such as a personal computer. The setting key 132 starts a mode of the layout setting of each destination of discharged papers. The liquid crystal display 133 is used in the layout

setting by the user.

The on-line key 131 switches the status of continuity between the on-line (the state of connection to an external device) and the off-line (the state of absence of connection to an external device) in response to each depression given thereto. An indicator 131a (for example: LED etc.) of the on-line key 131 is lit up at the start of the on-line cycle and lit off at the start of the off-line cycle.

The layout setting is effected on each discharged printed paper by the use of the setting key 132 and the display 133. The layout comprises to Ninl processing, double-side printing, paper size setting, margin setting, stapling, perforation, folding, sorting, water marking, printing of serial numbers, impression of printing time, and decision of enlargement or contraction.

The Ninl processing is to print N pages of image on one sheet of paper. The double-side printing is to print on both sides of each sheet of paper. The perforation is to form filing holes in each bundle of printed papers along one lateral edge thereof. The folding is to effect a double fold or a Z-shaped triple fold in printed papers. The sorting is to decide whether or not the directions of discharge of printed papers grouped as documents (or parts) are alternated or whether or not the printed papers sorted as documents (or parts) are

discharged as staggered in the direction perpendicular to the direction of paper discharge. The water marking is to mark such as "secret" and "copying strictly inhibited" which are added to printed matter.

5 Of these items of the layout setting, the Nin1, double-side printing, and size of paper will be described specifically herein below. The present invention brings the effects thereof similarly with respect to the other items than these three items.

10 Refer to Fig.3, this system is so configured for allowing an image formed by an external personal computer 3 to be printed out into a mail bin (discharged paper tray 11) designated by the printer 1. The printer 1 comprises the operating display 13, an image processing part 14, a RAM 15,
15 a ROM 16, a finisher 17, a finisher controller 18, an interface 19 and a CPU 20.

20 The image processing part 14 performs enlargement, contraction, Nin1, double-side printing and other image treatments of an image to be printed out. The RAM 15 stores temporarily the image data transferred from the personal computer 3. The ROM 16 memorizes various processing programs. The finisher 17 performs such post handling as stapling, perforation, and folding on printed papers. The finisher controller 18 controls the operation of the finisher 17. The

interface 19 transfers data to and from the personal computer 3. The CPU 20 effects comprehensively control of the component parts mentioned above. These parts excepting the finisher 17 are mutually connected by an internal bus 21.

5 The personal computer 3 is provided with an interface 31 for transferring data to and from the printer 1.

As the finisher 17 may be a so-called optional device, this invention may be embodied in the printer without the finisher 17. An embodiment of Fig.3 is illustrated that has
10 one printer 1 connected to one personal computer 3, but this invention can be embodied in the embodiment having one or more printers 1 connected to a plurality of personal computers 3.

In this printer 1, the layout setting at a printout is
15 performed for each of the destinations (mail bins) of printed papers. It does not set by the user for each print job. The output form (double-side printing, Nin1, etc.) of an image for the discharged papers, the size of paper of the discharged prints, and the post handling (stapling, perforation,
20 folding, etc.) to be performed on the printed discharged papers may be automatically unified for each of the mail bins

Refer to Fig.4-Fig.7, the user's layout setting is carried out on the operating display 13.

When the power source of the printer 1 is turned on,

the printer 1 is initially set at a state of communicating with the personal computer 3 (on-line). When the on-line key 131 is depressed only one time (S101: YES), the off-line processing (S102) for cutting the connection of the printer 1 with the personal computer 3 is carried out. And the printer 1 is watched in the off-line state till the on-line key 131 is subsequently depressed (S103: YES). At this time, the indicator 131a is put on when the printer 1 is in the on-line state or put out when the printer 1 is in the off-line state.

10 When the printer 1 is in the on-line state (S101: NO), if the setting key 132 is depressed (S104: YES), the display 133 puts up a prescribed "setting panel" (S105), as shown Fig.8.

15 In this "setting panel", when a cancel key 134b is depressed (S106: YES), the processing immediately returns to the step S101 and the printer 1 is returned to its initial state. When a layout setting key 134a is depressed (S107: YES), the display 133 is shifted to the subsequent prescribed "panel of designating destinations of discharged papers"(discharged paper panel) (S108), as shown Fig.9.

20 Subsequently, in this "discharged paper panel", when a cancel key 135d is depressed (S109: YES), the processing returns immediately to the step S105 and the display 133 is returned to the "setting panel" one frame back. When any one

of paper discharge destination keys 135a, 135b, 135c, and 135d is depressed (S110: YES), the destination of the discharged paper corresponding to the depressed key is designated by means of CPU 20 (S111). And the display 133
5 switches the panel thereof to the next prescribed "panel of set designation" (designated panel) (S112), as shown Fig.10. Namely, when the user depresses one of the keys 135a-135d corresponding to the particular destination of discharged paper which the user wishes to effect the layout setting,
10 the destination is designated at the address corresponding to the depressed key. Concretely, when the discharged paper destination 1 key 135a is depressed, the destination of discharge paper is designated at "1". When the discharged paper destination 2 key 135b is depressed, the destination
15 of discharge paper is designated at "2". When the discharged paper destination 3 key 135c is depressed, the destination of discharge paper is designated at "3". When the discharged paper destination 4 key 135d is depressed, the destination of discharge paper is designated at "4".

20 Subsequently, the user depresses the key corresponding to the setting to be effected on this "designated panel".

Concretely, in this "designated panel", when a cancel key 136d is depressed (S113: YES), the processing is immediately returned to the step S108 and the display 133

is returned to the "discharged panel". When a setting key 136e is depressed (S114: YES), the processing returns immediately to the step S101 and the printer 1 returns to the initial state in preparation for setting the next layout.

- 5 When a Nin1 key 136a is depressed (S115: YES), the processing is shifted to the procedure of processing shown in the flow chart of Fig. 5. When a double-side printing key 136b is depressed (S116: YES), the processing shifts to the procedure of processing shown in the flow chart of Fig.6. When a paper size key 136c is depressed (S117: YES), the processing shifts to the procedure of processing shown in the flow chart of Fig.7.

Next, it is described in operation corresponding to each mode of "designated panel".

- 15 First, when the Nin1 key 136a is depressed on the "designated panel" (S115: YES), the processing shifts to the flow chart of Fig.5 and the display 133 switches the screen thereof to the next prescribed "panel of setting Nin1"(Nin1 panel), as shown Fig.11 (S118).

- 20 Then, the user depresses the key corresponding to the necessary layout on this "Nin1 panel". Concretely, when a cancel key 137d is depressed in this "Nin1 panel" (S119: YES), the processing immediately returns to the step S112 and the display 133 returns to the "designated panel" one frame back.

When a 1in1 key 137a is depressed (S120: YES), the display 133 effects reversion and puts up the selected 1in1 key 137a (S123). When a 2in1 key 137b is depressed (S121: YES), the display 133 effects reversion and puts up the selected 2in1
 5 key 137b (S123). When a 4in1 key 137c is depressed (S122: YES), the display 133 effects reversion and puts up the selected 4in1 key 137c (S123). By effecting reversion and putting up the selected keys 137a-137c, the display 133 notifies the user of the completion of the selection.

10 When the cancel key 137d is depressed while the Nin1 keys 137a-137c remain in the state displaying reversion (S124: YES), the display 133 cancels the display of reversion (S125) and returns to the step S119.

While the Nin1 keys 137a-137c remain in the state
 15 displaying reversion, when the cancel key 137d is not depressed (S124: NO) and a setting key 13e is depressed (S126: YES), the layout setting designated at the steps S120-S122 is added to or made to supersede the destination of discharged paper selected formerly in the "discharged paper panel"
 20 (S127). And then, the display 133 subsequently returns to the "discharged paper panel" of the step S108.

When the double-side printing key 136b is depressed on the "designated panel" (S116: YES), the processing shifts to the flow chart of Fig.6. The display 133 shifts to the

panel of the subsequently prescribed "double-side panel",
as shown Fig.12 (S128).

Subsequently, the user depresses the key corresponding
to the layout expected in the "double-side panel".

5 Specifically, when a cancel key 138c is depressed in this
"double-side panel" (S129: YES), the processing immediately
returns to the step S112 and the display 133 returns to the
"designated panel" one frame back. When a one-side key 138a
is depressed (S130: YES), the display 133 effects inversion
10 and puts up the selected one-side key 138a (S132). When a
double-side key 138b is depressed (S131: YES), the display
133 effects inversion and puts up the selected double-side
key 138b (S132). By effecting inversion and putting up the
selected key 138a or 138b, the display 133 notifies the user
15 of the completion of the selection.

When the cancel key 138c is depressed while the one-side
key 138a or the double-side key 138b remains in the state
displaying the inversion (S133: YES), the display 133 cancels
the display of inversion (S134) and returns to the step S129.

20 When the cancel key 138c is not depressed (S133: NO)
and the setting key 138d is depressed (S135: YES) while the
one-side key 138a or the double-side key 138b remains in the
state displaying the inversion, the layout setting
designated at the step S130 or the step S131 is added to or

made to supersede the destination of discharged paper selected formerly in the "discharged paper panel" (S136). Then, the display 133 returns to the "discharged paper panel" at the step S108.

5 When the paper size key 136c is depressed in the "designated panel" (S115: YES), the processing returns to the flow chart of Fig. 7 and the display 133 switches the panel to the next prescribed "panel for setting paper size" (paper size panel), as shown Fig.13 (S137).

10 Subsequently, the user depresses the key corresponding to the layout expected in the "paper size panel". Specifically, when a cancel key 139e is depressed in this "paper size panel" (S138: YES), the processing immediately returns to the step S112 and the display 133 returned to the
15 "designated panel" one frame back. When A4 key 139a on the panel is depressed (S139: YES), the display 133 effects inversion and puts up the selected A4 key 139a. When A3 key 139b is depressed (S140: YES), the display 133 effects inversion and puts up the selected A3 key 139b (S143). When
20 B4 key 139c is depressed (S141: YES), the display 133 effects inversion and puts up the selected B4 key 139c. When B5 key 139d is depressed (S142: YES), the display 133 effects inversion and puts up the selected B5 key 139d (S143). By effecting the inversion and putting up the selected keys

139a-139d, the display 133 notifies the user of the completion of the selection.

When the cancel key 139e is depressed while the paper size keys 139a-139d remain in the state displaying the
5 inversion (S144: YES), the display 133 cancels the display of the inversion (S145) and returns to the step S138.

When the cancel key 139e is not depressed (S144: NO) and a setting key 139f is depressed (S146: YES), while the paper size keys 139a-139d remain in the state displaying the
10 inversion, the layout setting designated at the steps S139-S142 is added to or made to supersede the destination of discharged paper selected formerly in the "designated paper panel" (S147). Subsequently, the display 133 returned to the "designated paper panel" of the step S108.

15 Thus, the layouts of Nin1, double-side printing, and paper size are set for each of the destinations of discharged paper (main bins).

When the user is about to induce transfer of an image from the personal computer 3 to the printer 1, what processing
20 the user ought to resort to for the purpose of arranging in order the layout for each of the destinations of discharged papers will be described below.

The user prepares in the personal computer 3 an image to be produced. And, the user, for example, fixes the

of data set as sorted by destinations of discharged paper
in the RAM 15 memorizing the data for setting a layout for
each destination of discharged paper is shown in Fig.15B.
This data table is that is memorized the results of the layout
5 setting (Fig.4-Fig.7).

When the receiving data has been stored in the
prescribed area of the RAM 15, the CPU 20 reads the header
in the stored data. And the CPU 20 extracts the information
on the destinations of discharged papers (designated mail
10 bins) written in the header (S204). And then, the CPU 20 judges
whether or not the designated destinations of discharged
paper have already been set for layout by consulting the table
of data set as sorted by destinations of discharged paper,
as shown Fig.15B (S205).

15 As a result, if the designated destinations of
discharged paper have been set for layout (S205: YES), the
header already stored in the RAM 15 is canceled at the step
S203. Namely, the CPU 20 invalidates the information of
layout designated by the personal computer 3, and at the same
20 time, validates the information of layout stored in the data
table of set as sorted by destinations of discharged paper.
This information of layout is that is already set with respect
to the destinations of discharged paper. And the CPU 20 writes
the information of layout as headers in the image data area

in the RAM 15 (S206). In Fig.15, the arrow P depicts an example of writing the layout setting data i.e. layout information of the destination 1 of discharged paper as a header into the image data area of the RAM 15. If the designated
5 destination of discharged paper has not been set for layout (S205: NO), the header stored in the RAM 15 at the step S203 is validated, namely the layout information designated by the personal computer 3 is validated (S207).

Subsequently, the CPU 20 transfers the header and the
10 image data written in the image data area of the RAM 15 to the image processing part 14. And the image processing part 14 processes the image data in accordance with the available layout information (such as Nin1, double-side printing, and paper size) written in the header and outputs an image to
15 be emitted (S208). The produced image is printed on the papers and the printed papers are emitted to the destinations of discharged paper designated by the personal computer 3 (S209). The emission of the printed papers to the designated destinations of discharged paper is effected through the
20 medium of a finisher 17, with necessary data transferred to a finisher controller 18. When post handling i.e. stapling, perforation, and folding etc. has been set with respect to the destinations of discharged paper in this case, the printed papers are discharged into designated discharged

paper trays 11 after the set post handling have been performed by the finisher 17.

When the printed papers are discharged to the destinations of discharged paper which have undergone layout setting as described above, all the prints are produced in a unified layout.

In accordance with this embodiment, since the layouts of the printed papers discharged into the mail bins are unified, the users of the mail bins are thereafter enabled to attain orderly arrangement and management of documents with ease.

<<Second embodiment>>

This embodiment assumes as a premise the use of the printer 1 according to the first embodiment, namely the printer 1 which is provided with paper discharge openings allowing outlet layouts to be set for each of the destinations of discharged papers, and aims at improving this printer 1. By storing in the memory the image data already edited in the layout to be discharged when the supply of papers to be used for printing has run out, the present embodiment promotes effective use of the memory and reduction in the time of output (referred to hereinafter as "printer 1a"). In the following description, Fig.1-Fig.15 are suitably referred to.

66077-664E460

The ordinary printer receives the print data embracing image data and the layout information thereof, processes the image data in conformity with the layout information, and effect printing. It must be loaded with a memory of large volume for the purpose of enabling the image data to be preserved intact in the memory (RAM) till the papers fit for the discharge are replenished after the supply thereof has run out. Further, it consumes much time for the discharge because the image data needs to be edited again after the papers have been replenished.

The present embodiment, therefore, is stored in the memory the image data which has been edited in the layout to be discharged when the supply of papers for producing prints runs out.

15 Refer to Fig.16, when the user produces A4: 4-page document with the personal computer 3, and prints this document in the 4in1 mode on A4 papers, and then discharges the printed papers to the designated destinations, the printer in the absence of papers fit for the printing retain the image data till the supply of the fit papers is replenished.

The ordinary printer, for the purpose of preserving the received data intact, stands in need of a memory capacity of 16 MB + . for storing four A4 size 600 dpi pages of image

data each of about 4 MB (namely 16 MB) and the header containing layout information (. MB) (Fig.16A).

In contrast, the present embodiment can preserve the edited image data with a memory for storing one A4 page of
5 about 4 MB and obviates the necessity for a memory area for the header (Fig.16B). Further, the image data to be produced is in an already edited form and the output time after the replenishment of papers can be reduced.

Incidentally, since the processing from the step S301
10 through the step S308 of Fig.17 is identical with the processing from the step S201 through the step S208 of Fig.14, it will be omitted from the following description.

When an edited image is produced at the step S308, the CPU 20 judges whether or not designated fit papers are present
15 in at least one of the paper discharge openings (S309). If the presence of fit papers is confirmed (S309: YES), the image is printed on the papers and the printed papers are discharged to the destinations of discharged paper designated by the personal computer 3 (S310). If the absence of fit papers is
20 confirmed (S309: NO), the image data is temporarily stored (S311). And the image data is reprinted on the fit papers after the supply of papers has been replenished (S312).

Refer to Fig. 18, when the image data is stored in the memory (RAM 15) (S311), examines the data area of the memory

(RAM 15) to determine whether or not it has a vacancy. If the data area is found to have a vacancy (S321: YES), the edited image data is stored in that area (S322). If the data area is found to have no vacancy, the display indicates that
5 the capacity of the memory is insufficiency (S323).

The ordinary printer requires to store the information on edition i.e. layout information and the image data separately of each other (S4232, S423) and, moreover, stands in need of information for associating the image data and
10 the information on edition.

By storing the edited image data as in the case of the present embodiment, therefore, the memory (RAM 15) can be used effectively when the image data is to be preserved in the main body of the printer.

15 Refer to Fig. 19, when the printer is required to reprint (S313), examines itself to confirm that the supply of papers has been replenished (S331: YES) and that the fit papers are present (S332: YES). And then, the printer reads the temporarily stored edited image data from the memory (RAM
20 15) (S333), prints the image data on the fit papers, and discharges the printed papers to the destinations of discharged paper designated by the personal computer 3 (S334). This procedure is repeated till the area storing the edited image data is emptied, namely till all the image data of one

job to be printed has been printed out (S335: YES).

The ordinary printer causes the image data and the information on edition i.e. layout information temporarily stored in the memory to be read out separately of each other
5 from the memory (S433 and S434). And the ordinary printer processes the image data in conformity to the information on edition (S435), and then discharges the printed papers to the designated destinations of discharged paper (S436).

By storing the edited image data as in the case of this
10 embodiment, therefore, the time for output can be reduced because the processing for edition is not required during the course of output after the supply of papers has been replenished.

While the first and second embodiments adopt the mode
15 of causing the image data received from the personal computer to be printed with a printer, the present invention can be embodied in a copying machine which comprises a scanner and a printer. In this case, the form of output is set in advance by designating trays with the aid of the operating panel.
20 In the case of the copying operation, by simply designating the destinations of discharge (trays), the copying is carried out in the form of output using the designated trays. The user's burden on the copying operation, therefore, can be reduced to the extent of designating trays and setting the

number of copies to be produced.

SECRET - 6642E460

CLAIMS

1. An image forming apparatus comprising;
a plurality of trays for receiving discharged sheets bearing
a formed image,
5 a setting means for setting the form of output with respect
to at least one of said plurality of trays,
and an image forming unit for forming an image on the sheets
in the form of output set by said setting means when the tray
which the form of output has been set is selected as the
10 destination of discharged paper.
2. An image forming apparatus according to claim 1,
wherein said setting means comprises a selector for selecting
one tray from said plurality of trays and sets the form of
output with respect to the tray selected by said selector.
- 15 3. An image forming apparatus according to claim 1,
wherein said setting means sets the form of output with
respect to each of said plurality of trays.
4. An image forming apparatus according to claim 1,
wherein said form of output serves the purpose of forming
20 images each on the obverse and the reverse side of a sheet.
5. An image forming apparatus according to claim 1,
wherein said form of output serves the purpose of forming
images of a plurality of pages on one sheet.
6. An image forming apparatus according to claim 1,

wherein at least one of said plurality of trays is allocated to a specific user as a discharged destination.

7. An image forming apparatus according to claim 1, which further comprises an editing means for editing an image
5 data in accordance with the form of output of an image and a memory for storing an image data edited by said editing means when the supply of sheets to be discharged runs out.

8. An image forming apparatus according to claim 7, wherein said edited image data has a smaller volume than the
10 image data yet to be edited.

9. An image forming apparatus according to claim 1, which further comprises a receiving means for receiving data concerning the discharged destination and the form of output and an image data as a set, said image forming unit serving
15 the purpose of forming an image on sheets based on the image data received by said receiving means.

10. An image forming apparatus according to claim 9, which further comprises a judging means for examining the tray decided based on the received data of discharged
20 destinations to judge whether or not the form of output has been set by said setting means, and a controller for invalidating the received data concerning the form of output when said judging means draws a judgment that the form of output has been set for said tray.

11. An image forming apparatus comprising;
a plurality of trays for receiving discharged sheets bearing
a formed image,
a registering means for registering an output layout with
5 respect to at least one of said plurality of trays,
a receiving means for receiving the information concerning
the trays as discharged destinations and the output layout
and the image data transmitted from an external device, a
print unit for printing an image based on the received image
10 data,
a judging means for examining the tray decided based on the
received data of discharged destinations to judge whether
or not the output layout has been registered by said
registering means,
15 and a controller for causing said print unit, when said
judging means judges that an output layout has been
registered with respect to said tray, to produce prints in
the registered output layout irrespective of the output
layout which has been received.

20 12. An image forming apparatus comprising;
a plurality of trays for receiving discharged sheets bearing
a formed image,
a setting means for setting the size of discharged sheets
with respect to at least one of said plurality of trays,

and an image forming unit for supplying sheets of the size set by said setting means when the tray having set the size of discharged sheets is selected as the discharged destination and then forming an image on said sheets.

5 13. An image forming apparatus according to claim 12, wherein said setting means comprises a selector for selecting one tray from said plurality of trays and sets the size of sheets to be discharged to the tray selected by said selector.

10 14. An image forming apparatus according to claim 12, wherein said setting means sets the sizes of sheets to be discharged respectively to said plurality of trays.

15 15. An image forming apparatus according to claim 12, which further comprises a receiving means for receiving the data concerning the discharged destination and the size of sheets and an image data as a set, said image forming unit serving the purpose of forming an image on sheets based on the image data received by said receiving means.

20 16. An image forming apparatus according to claim 15, which further comprises a judging means for examining the tray decided based on the received data on the discharged destinations to judge whether or not the size of sheets has been set by said setting means, and a controller for invalidating the data concerning the size of received sheets when said judging means has drawn a judgment that the size

of sheet has been set for said tray.

17. An image forming apparatus comprising;
a plurality of trays for receiving discharged sheets bearing
a formed image,
5 a setting means for setting post handling of discharged
sheets with respect to at least one of said plurality of trays,
and a sheet processing unit for performing the post handling
of sheets set by said setting means when the tray having set
the post handling of discharged sheets is selected as the
10 discharged destination.

18. An image forming apparatus according to claim 17,
wherein said post handling of sheets is a processing for
stapling a bundle of sheets.

19. An image forming apparatus according to claim 17,
15 wherein said post handling of sheets is a processing for
punching sheets.

20. An image forming apparatus according to claim 17,
which further comprises a receiving means for receiving the
data concerning the discharged destination and an image data
20 as a set, said image forming unit serving the purpose of
forming an image on sheets based on the image data received
by said receiving means.

ABSTRACT

A printer is disclosed which automatically unifies the layout of output to each of mail bins. This printer sets the layout for each of the discharged paper trays (mail bins).

- 5 The information of layout designated by a personal computer is invalidated when the layout has been set for the mail bins designated by an external personal computer. By storing in a memory the image data edited in the layout to be produced when the supply of papers has run out, the printer permits
- 10 effective use of the memory and a reduction in the time of output.

FIG.1

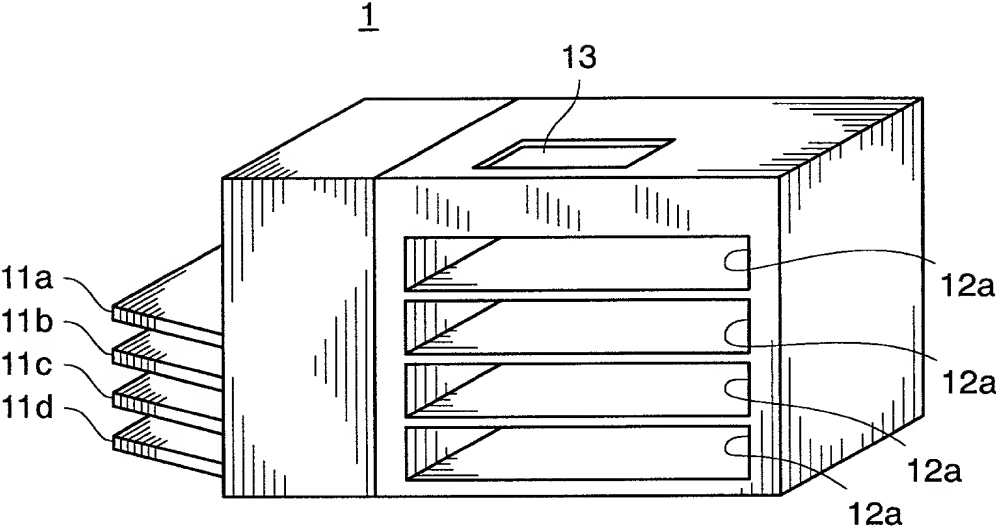


FIG.2

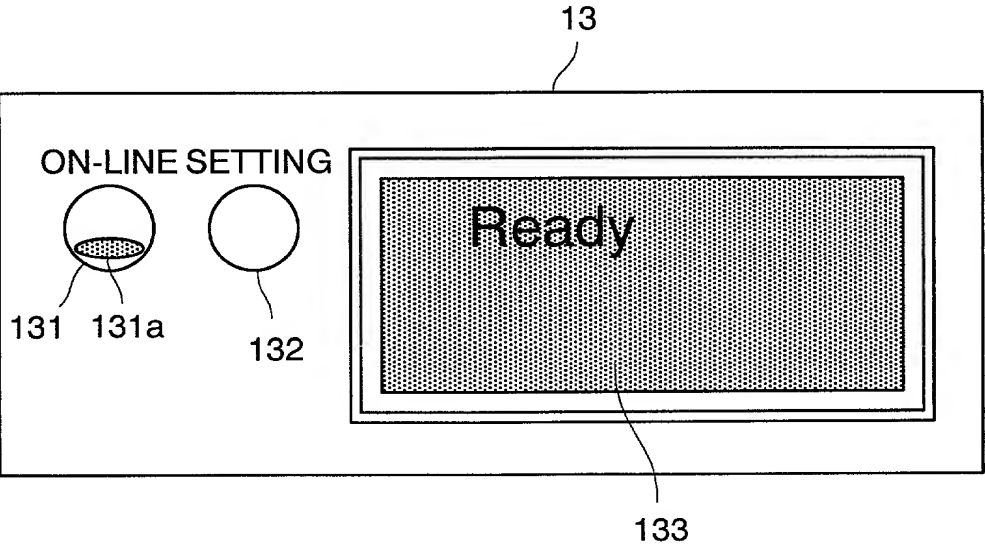


FIG.3


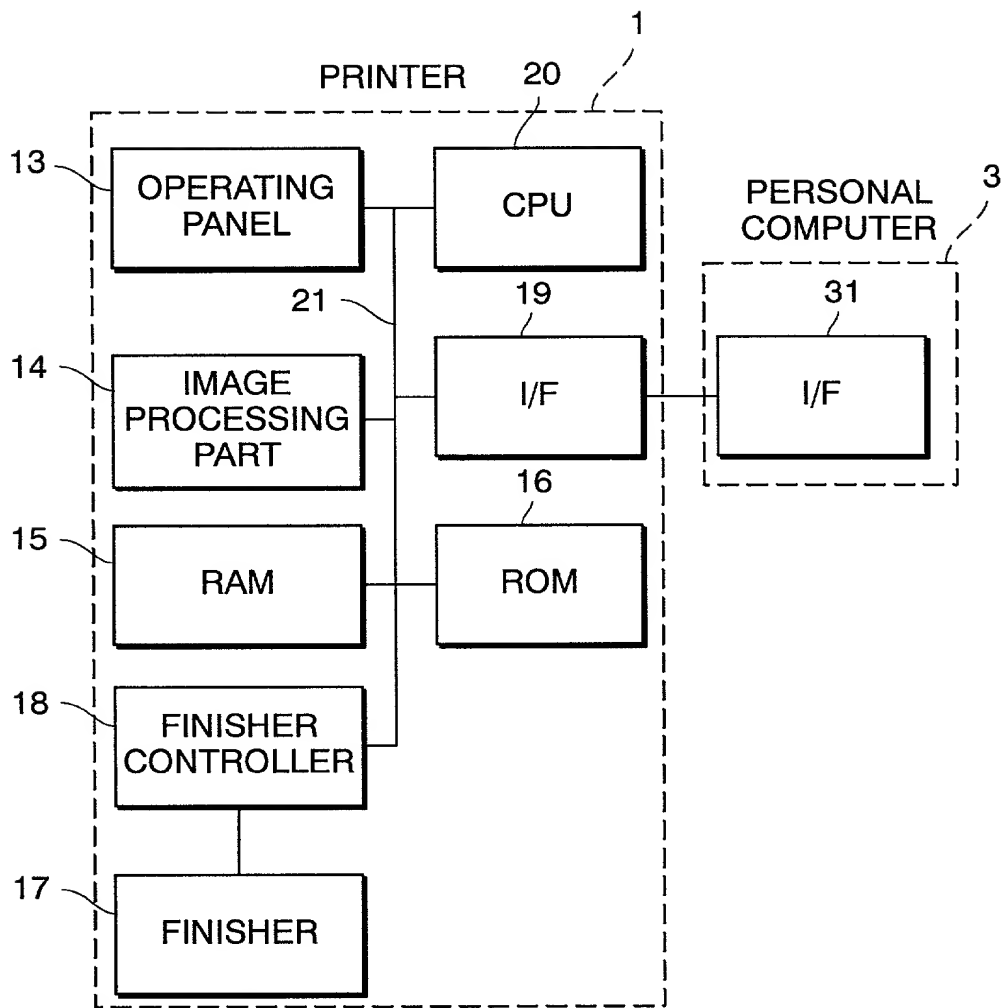


FIG.4

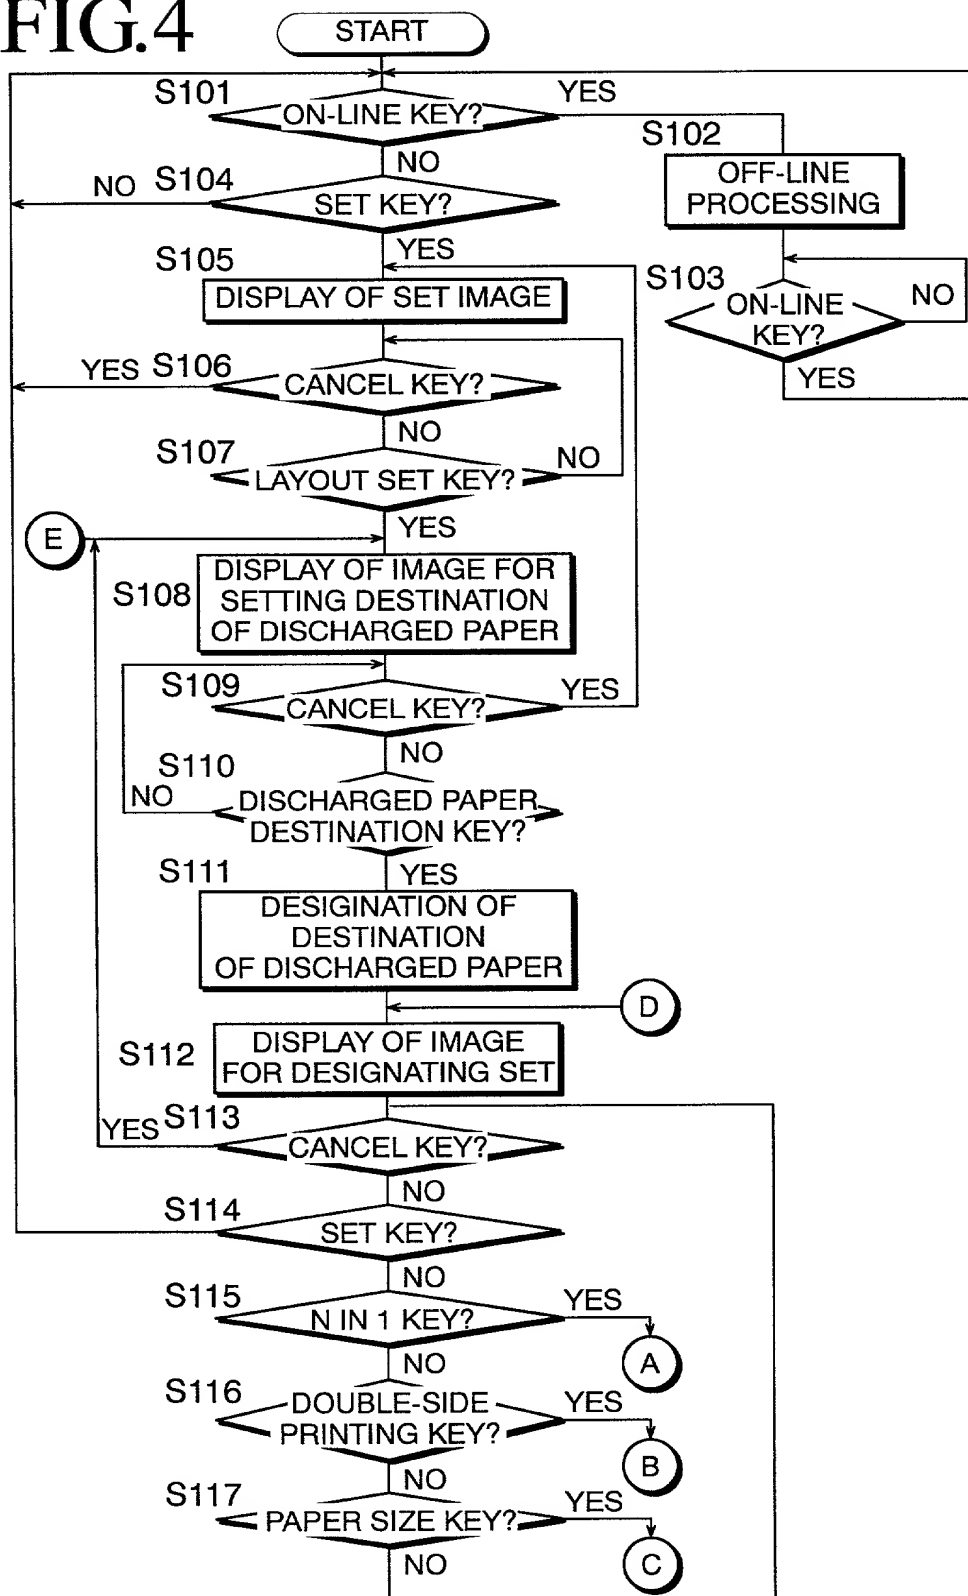

660777-6642460

FIG.5

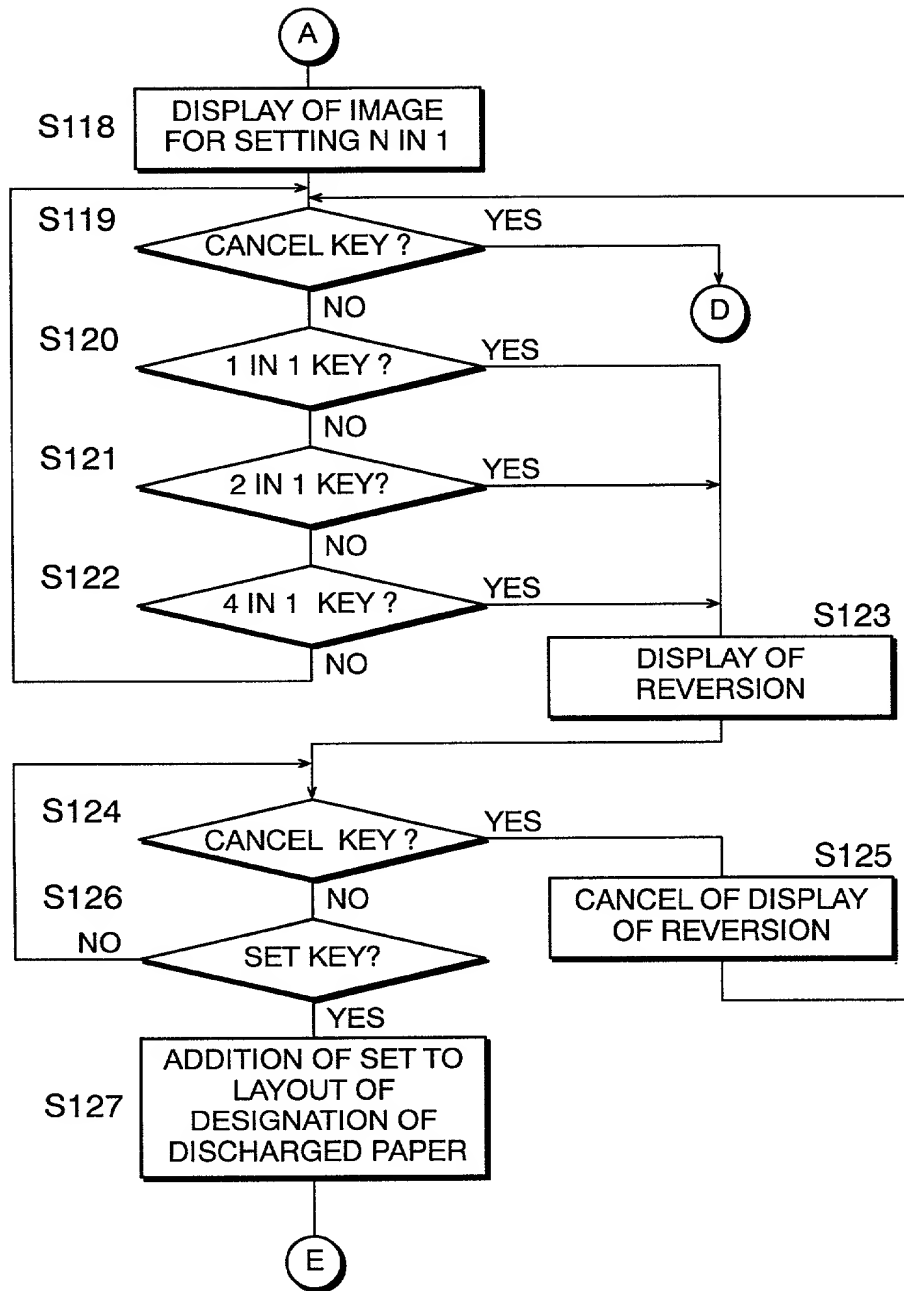


FIG.6


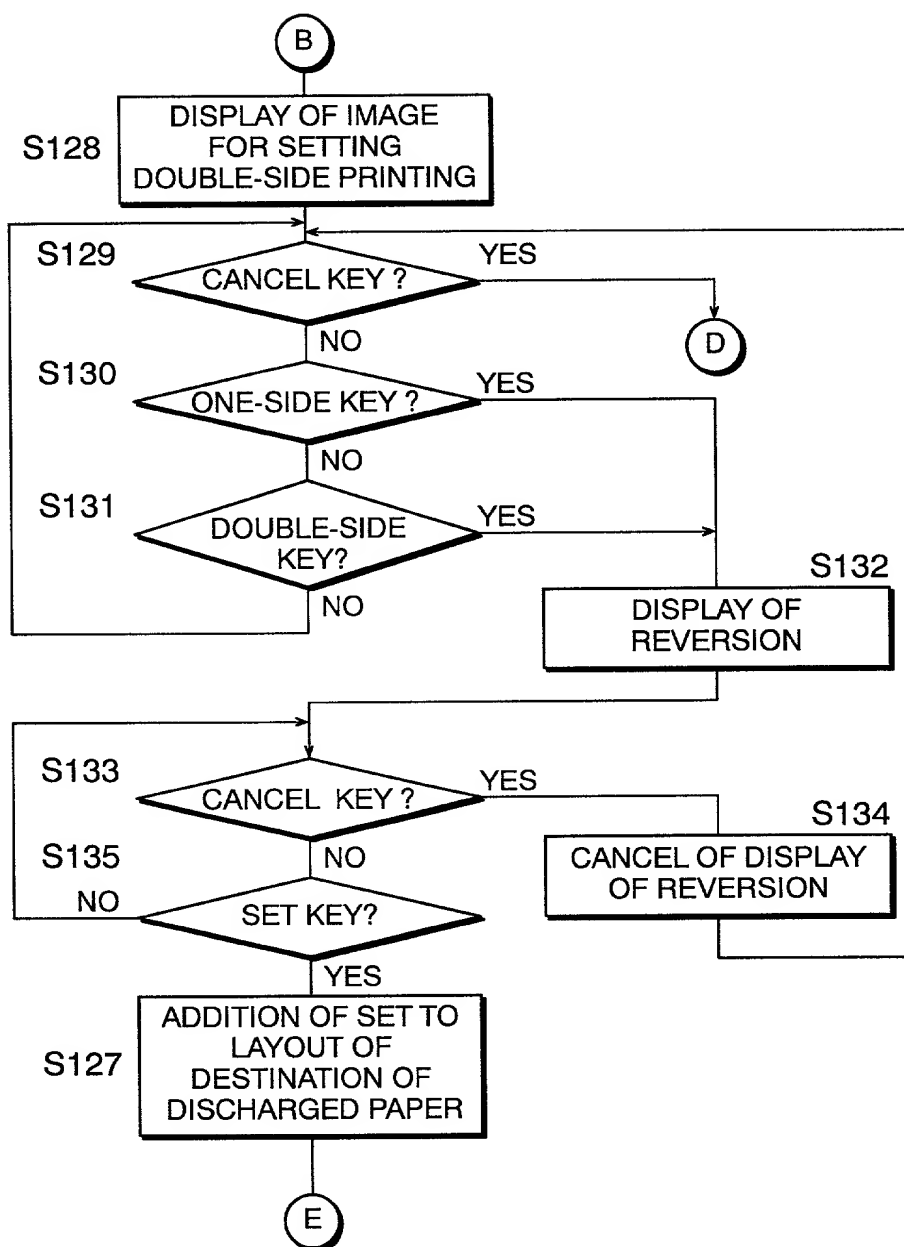


FIG.7

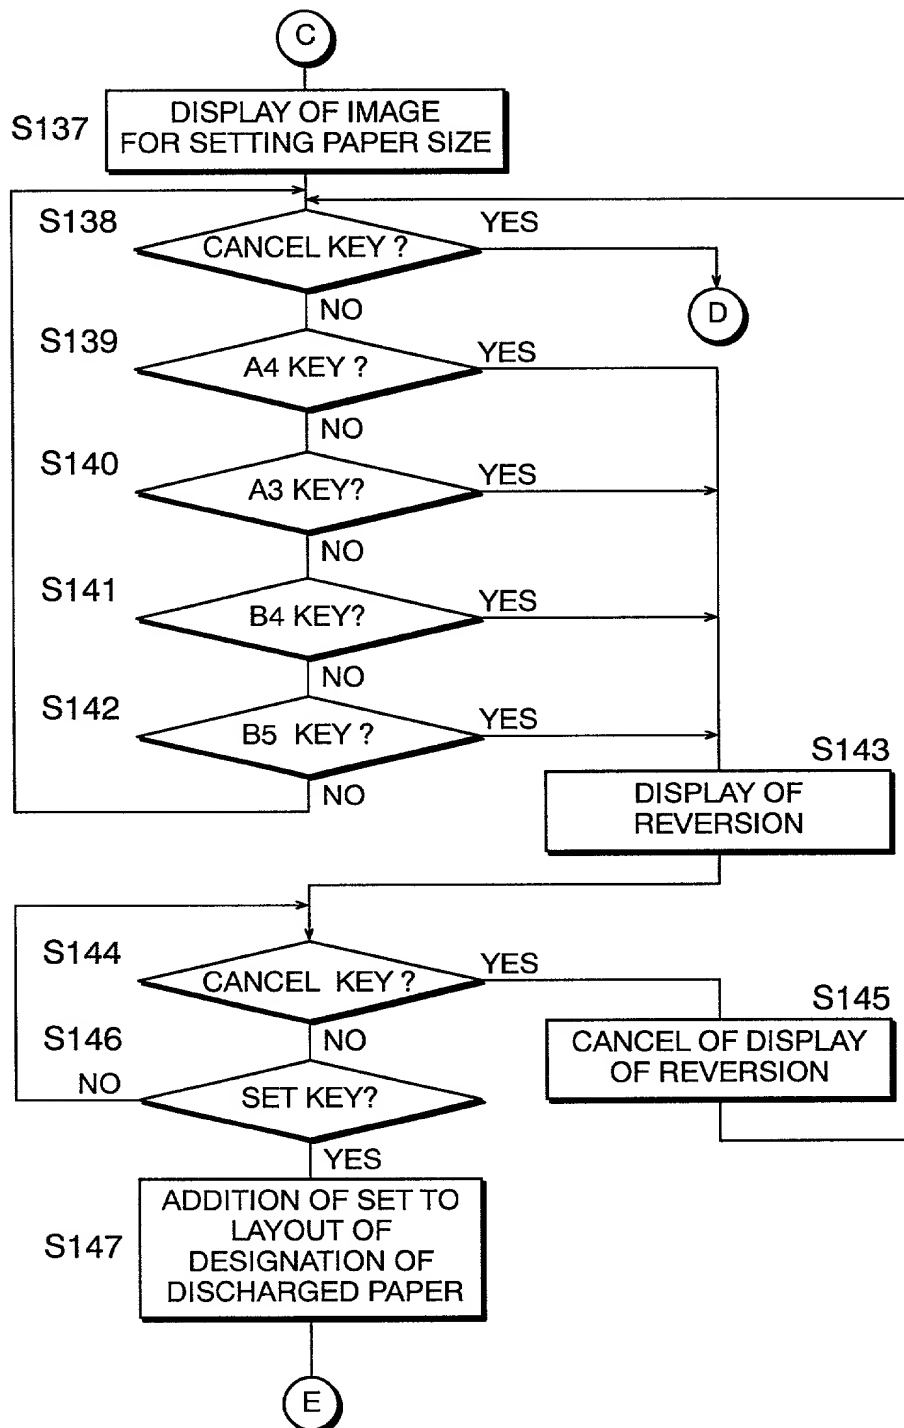

660111" 6642E460

FIG.8

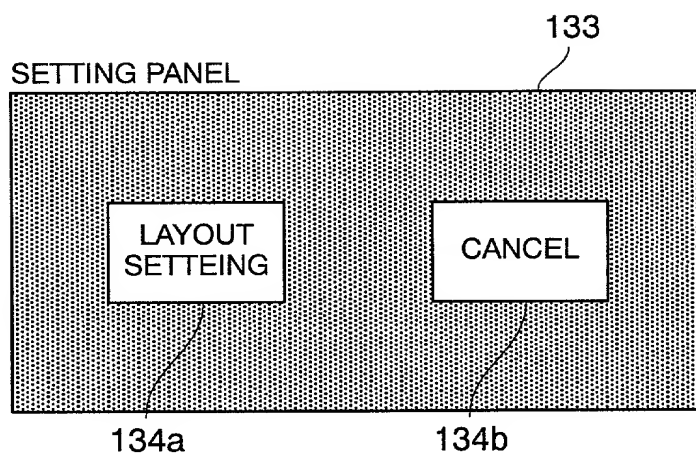


FIG.9

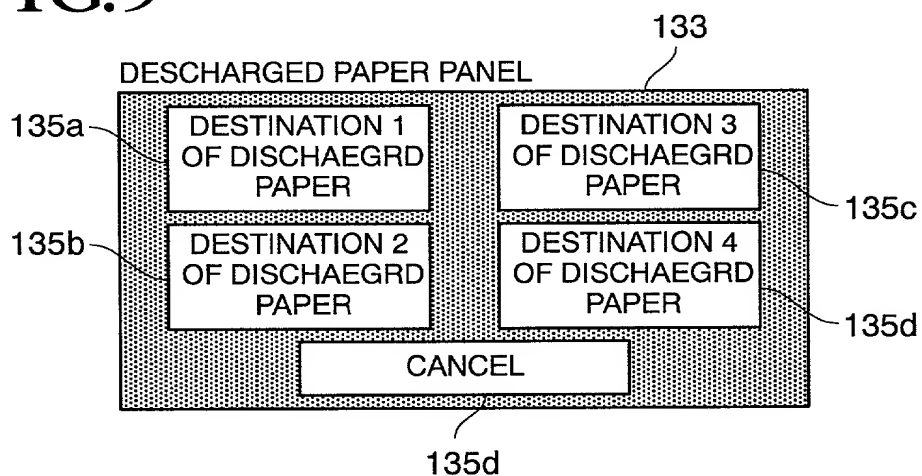


FIG.10

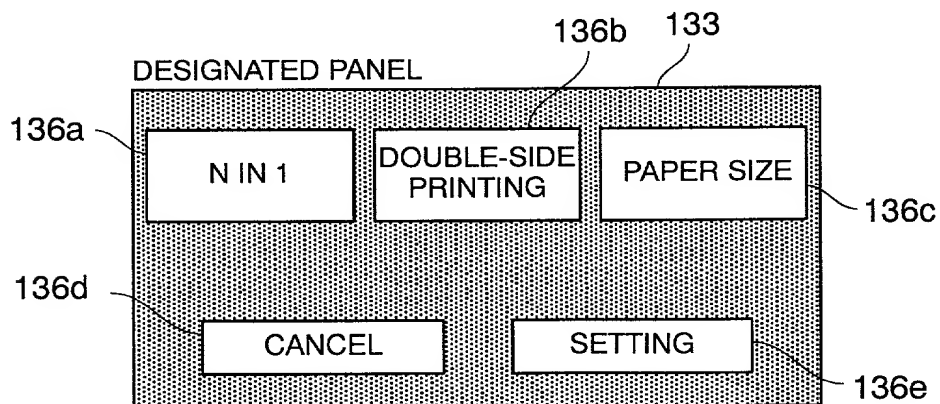


FIG.11

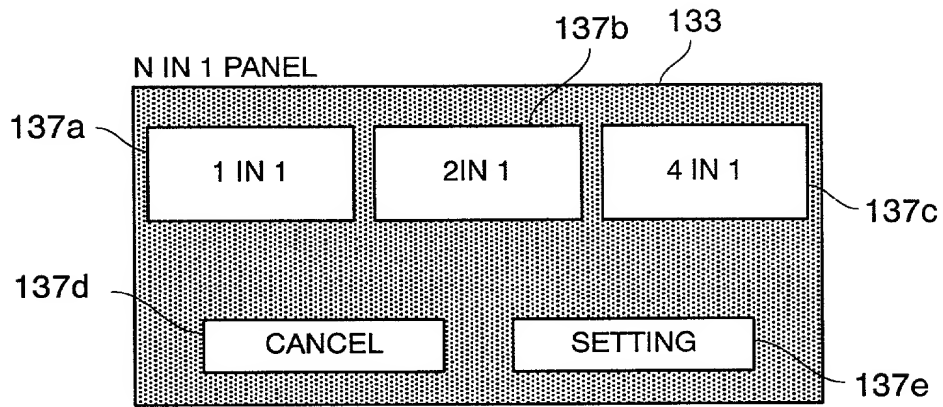


FIG.12

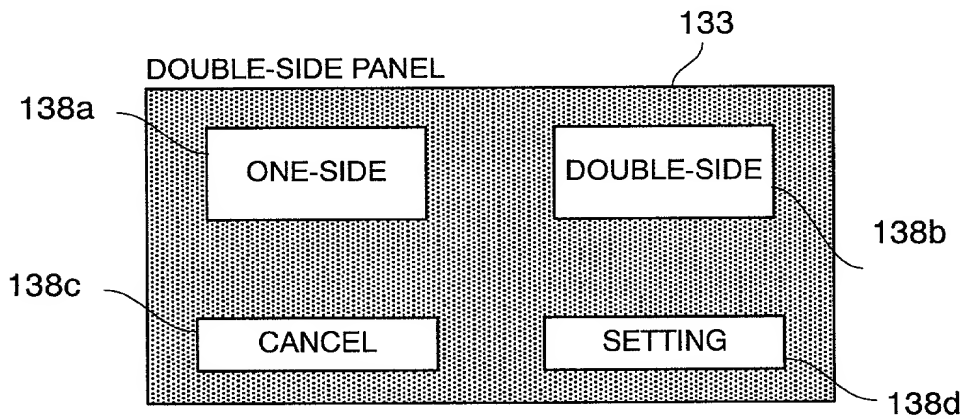


FIG.13

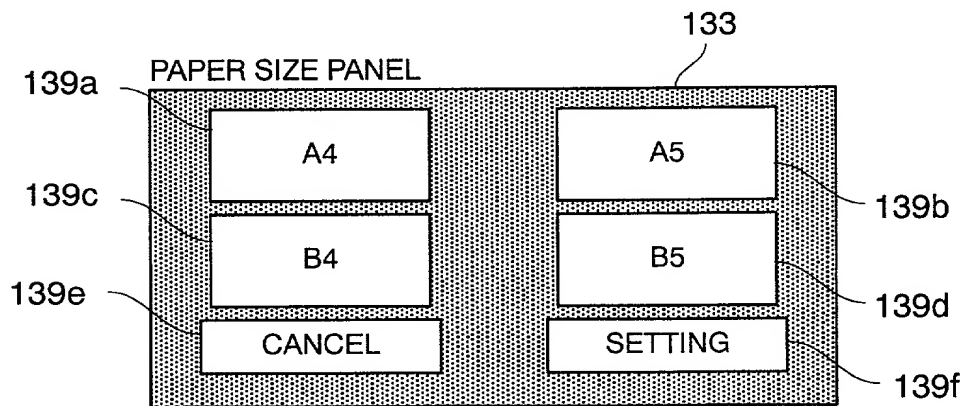


FIG.14

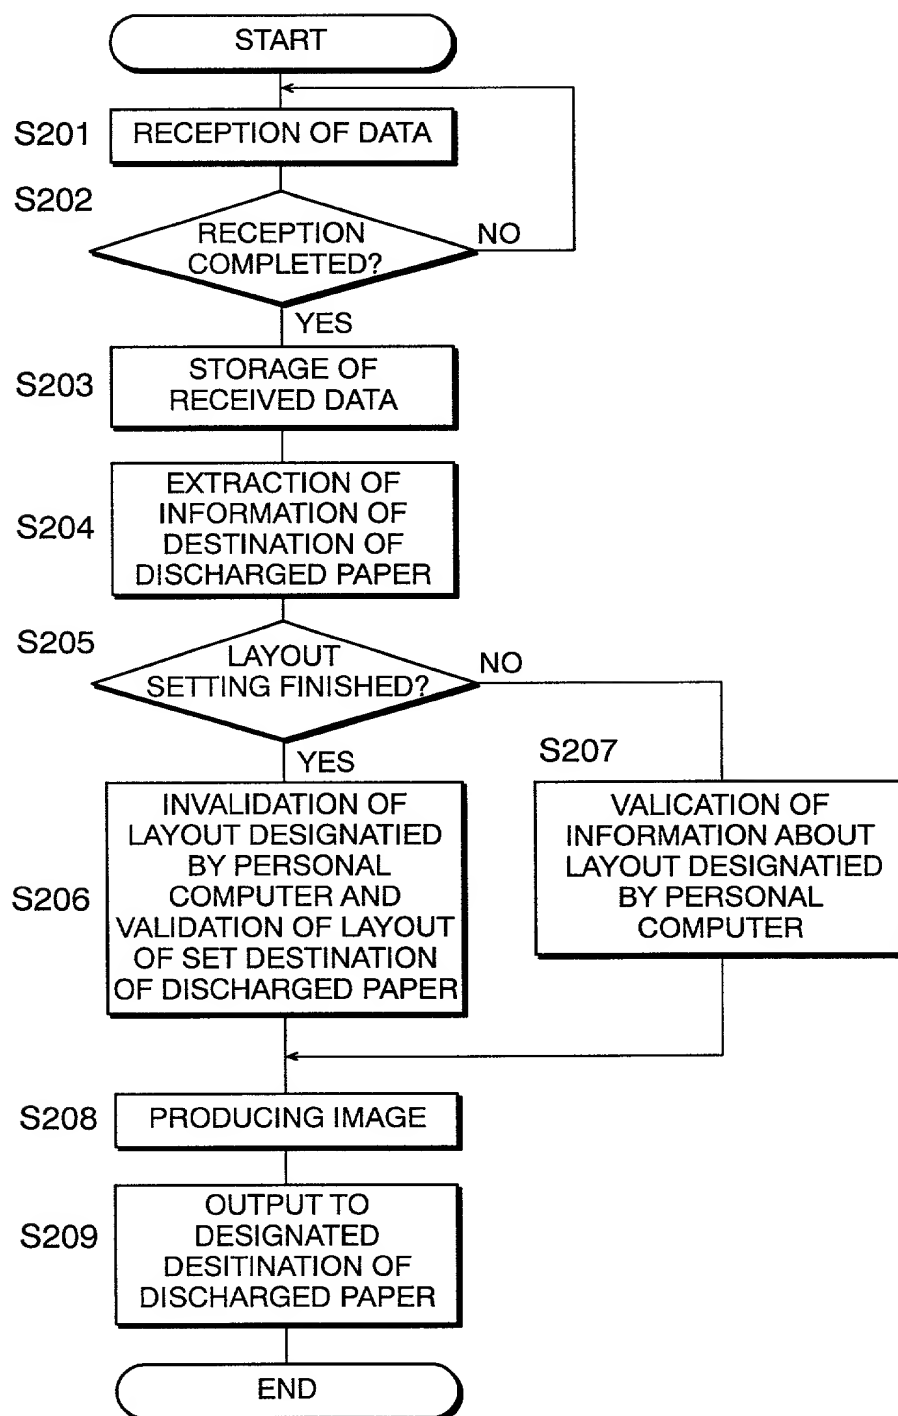


FIG.15

(A)


IMAGE DATA AREA

DATA FOR STARTING JOB
HEADER
IMAGE DATA 1
IMAGE DATA 2
⋮
DATA FOR FINISHING JOB

(B)

TABLE OF DATA SET AS SORTED
BY DESTINATION OF
DISCHARGED PAPER

DATA FOR LAYOUT SETTING (DESTINATION 1 OF DISCHARGED PAPER)
DATA FOR LAYOUT SETTING (DESTINATION 2 OF DISCHARGED PAPER)
DATA FOR LAYOUT SETTING (DESTINATION 3 OF DISCHARGED PAPER)
DATA FOR LAYOUT SETTING (DESTINATION 4 OF DISCHARGED PAPER)



65071T 664/E460

FIG.16


(A)

HEADER (INFORMATION ON LAYOUT)
PAGE 1
PAGE 2
PAGE 3
PAGE 4

(B)

PAGE 1	PAGE 2
PAGE 3	PAGE 4

FIG.17

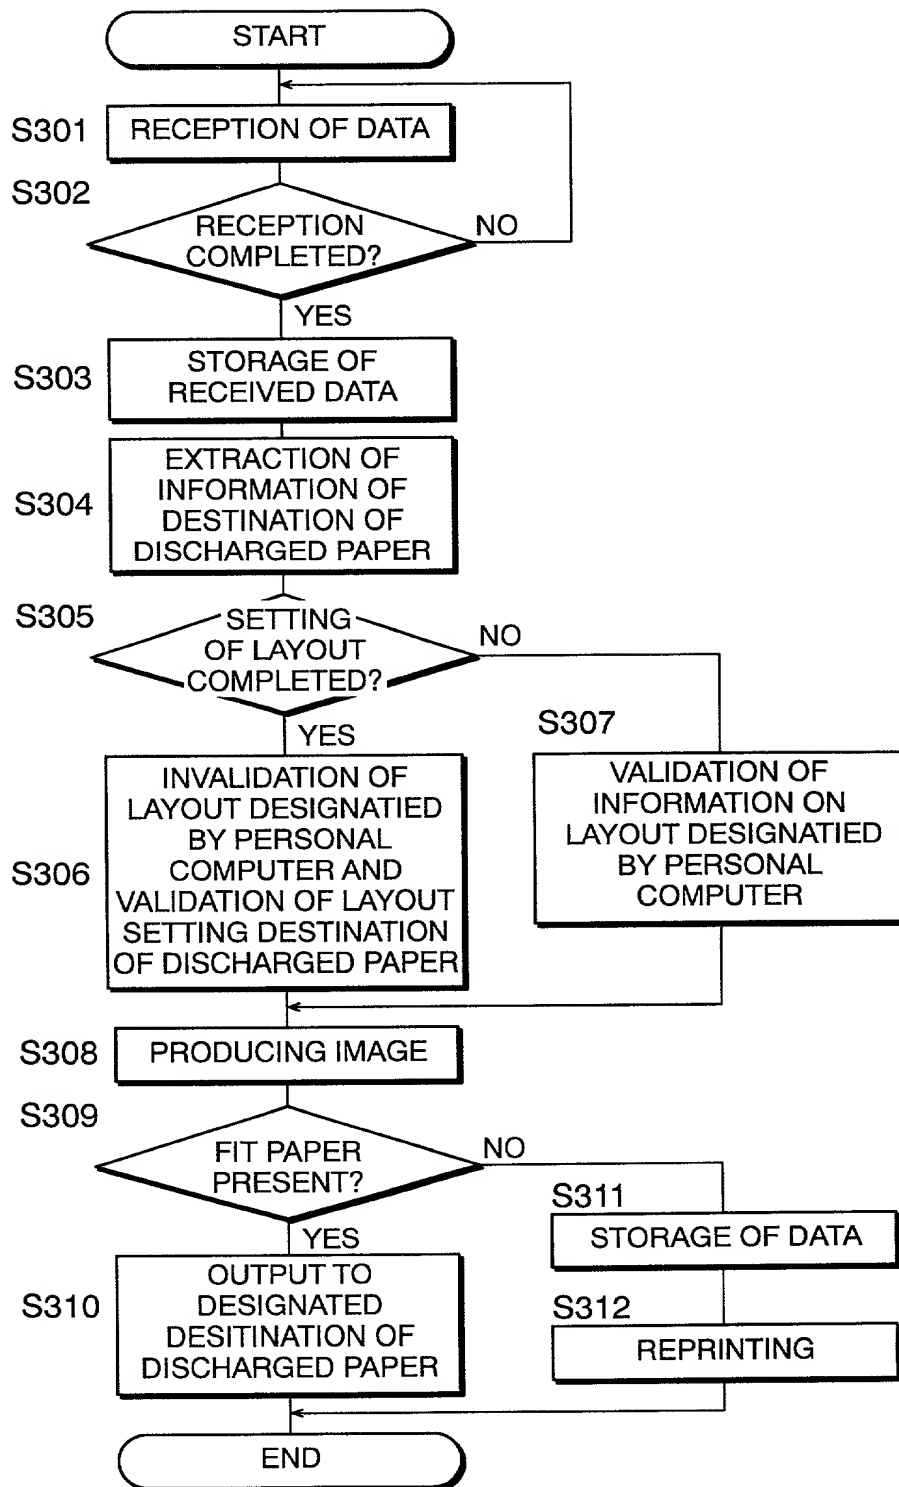

66077-1 6642450

FIG.18

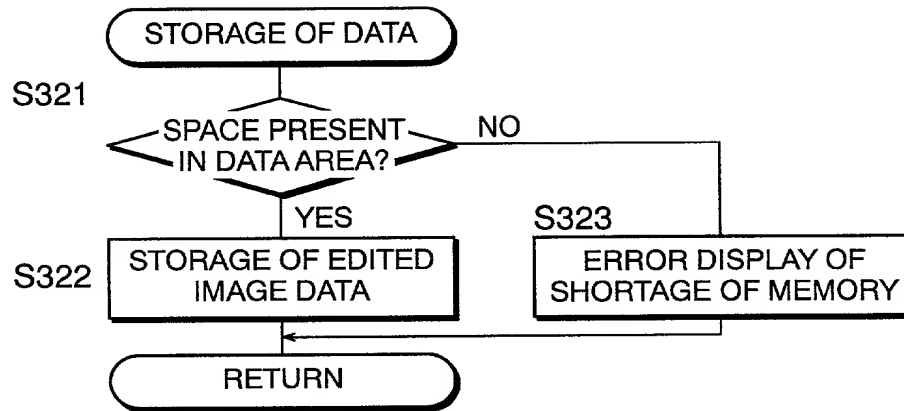


FIG.19

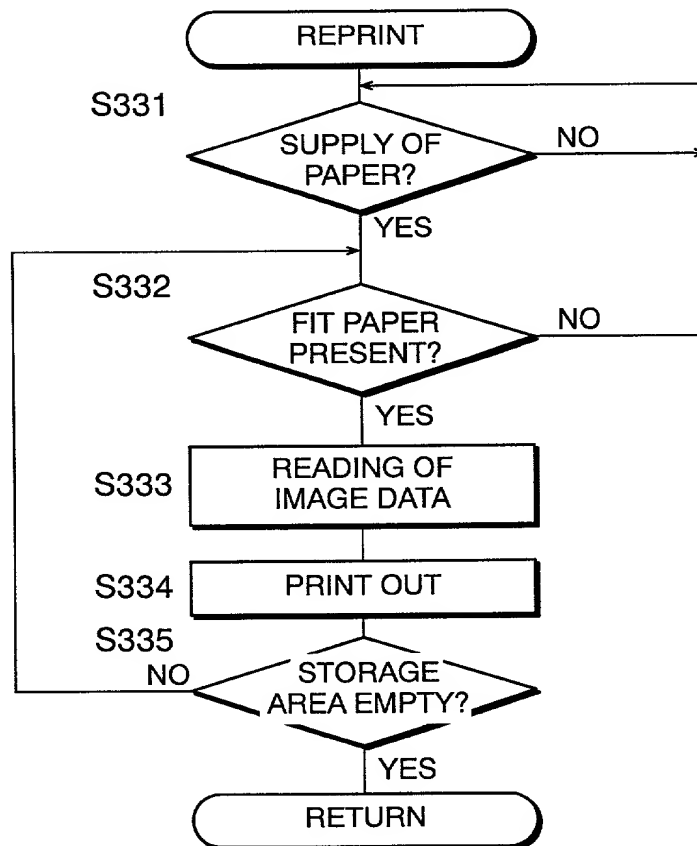


FIG.20


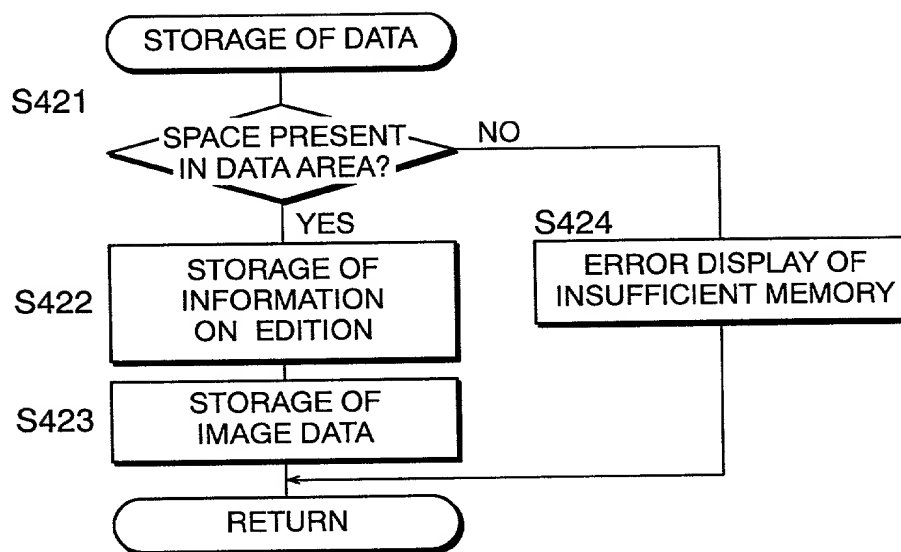


FIG.21

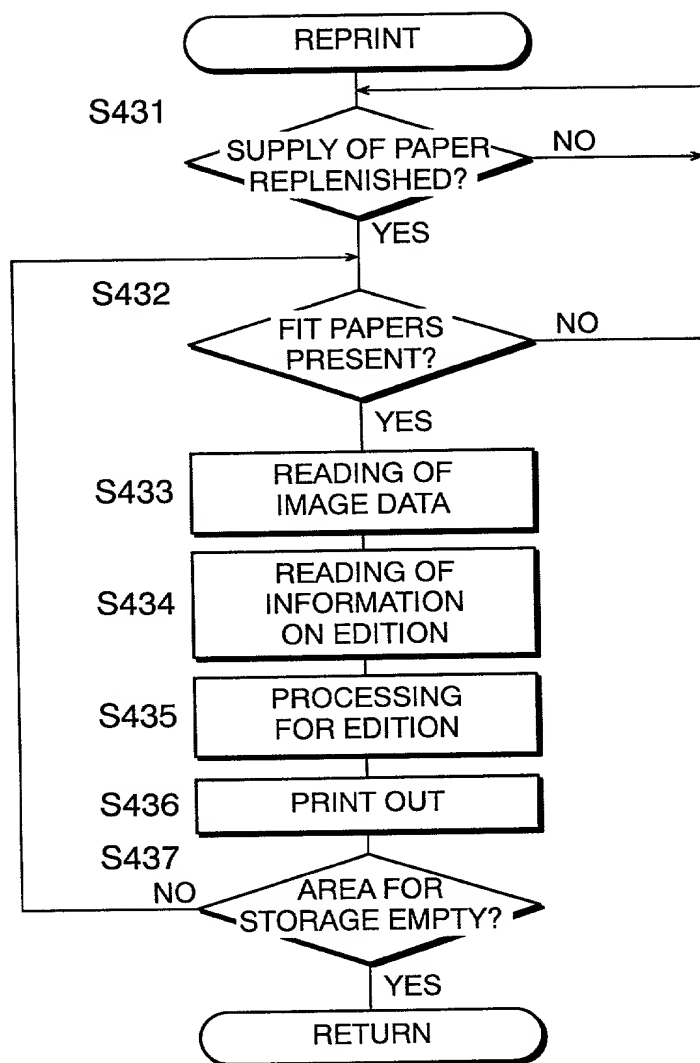

66077" 6642E460